



ECOLASTIC® PLAY EPDM GRANULES

'SAFETY THAT'S HERE TO STAY'



EPDM granules designed for softness, resiliency and color fading resistance.

Ecolastic® PLAY is suitable for the installation of wet pour safety surfacing in playgrounds and jogging tracks.



Fire-Retardant



Durable



Cost-Efficient



Non-Toxic



Stringent Quality Control




> Color Availability

Contemporaries




Radiants

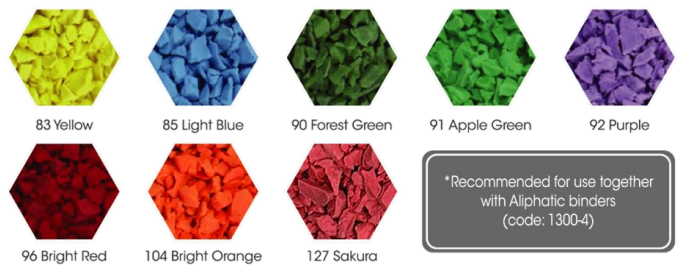

*Recommended for use together with Aliphatic binders (code: 1300-4)

> Size Distribution

Ecolastic® Play EPDM Granules 1.0-4.0mm

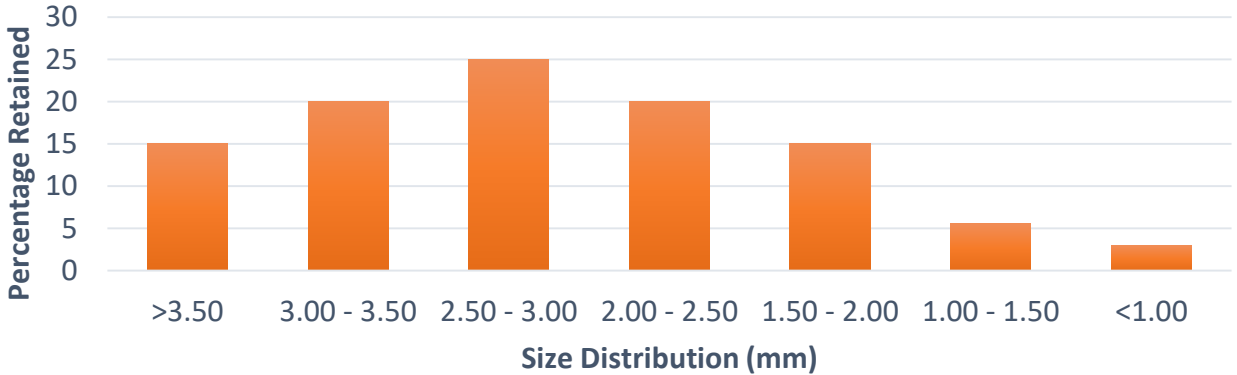

> Product information

| Properties | Specification | Test standard method |
|------------------------|---------------------|----------------------|
| Tensile Strength (MPa) | >3.0 | ASTM D 412 |
| Elongation (%) | >300 | ASTM D 412 |
| Hardness | 60 ± 5 | ASTM D 2240 |
| Specific Gravity | 1.65 ± 0.05 | ISO 2781:2008 |
| Color | (Delta E) ΔE ≤ 2.00 | ASTM D 2244 |
| Size Availability** | 1.00-4.00mm | ASTM D 5644 |
| Bulk Density (g/liter) | 700 ± 30 | ASTM D 1895 |

> Compliant

- REACH Test (Year Test: 2013) 144 Substances of Very High Concern (SVHC) for authorization published by European Chemicals Agency (ECHA) and EC concerning the REACH.
- PAH Test (Year Test: 2012) DIN EN 2286ff
- RoHS Test (Year Test: 2012) According to RoHS Directive 2011/65/EU Annex II
- EN71-3: 2014 + A1: 2014 (Year Test: 2016)-With reference to EN71 Part 3;2013 + A1; 2014- Migration of Certain Elements-Category III Analysis (ICP-OES)



Certificate No : MY07/01513



Fairmont Industries (464734-X)

No.2, Jalan Wawasan 3/KU7,
Sungai Kapar Indah,
42200 Klang, Selangor, Malaysia
+603-3291 9696 / +603-3291 6886
sales@fairmontindustries.com